

ZERO[®] BRASS

STOLPARMATUR/POLE FIXTURE



ZERO[®]

BRASS

STOLPARMATUR/POLE FIXTURE

Utförande

Lackerad metall, pärlguld RAL 1036. Yttre skärm i transparent acryl.
Mässingsnät och opal akryl.

LED info


Bestyckad med LED ljuskälla Philips True Force/E27. Systemeffekt 28W. Livslängd 50.000 timmar. Armaturlumen 2240LM. Korrelerad färgtemperatur 3000K. Färgtolerans SDCM 3. Färgåtergivning RA 80.

Montage

På stolpe med stolptopp D 60 mm. Stolpe finns som tillbehör. Fundament tillhandahålls ej av Zero.

Anslutning

Via säkringsinsats 4x10mm² i stolpe. Säkringsinsats ingår ej.

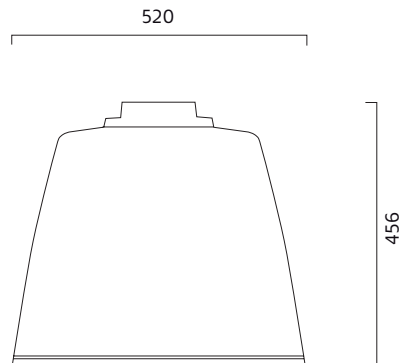

Finish

Painted metal, pearl gold RAL 1036. Shade in transparent acrylic.
Brass net and opal acrylic diffuser.

LED info


Including a LED light source Philips True Force/E27. Lifetime 50.000h. System power: 28W. Luminaire Luminous Flux 2240LM. CCT 3000K. SDCM 3. CRI 80.

Installation

On pole-top diameter 60 mm. We recommend to use a local supplier of the pole as standards may vary between different countries. The pole we are able to supply are according to Swedish standards for buried foundation.

Connection

Terminal block 4x10mm².

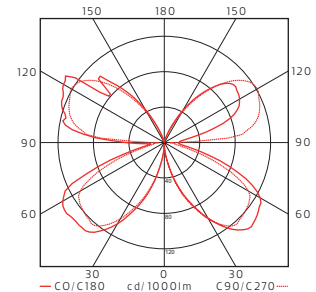

ZERO[®]**BRASS**

STOLPARMATUR/POLE FIXTURE

PRODUKTFAKTA/PRODUCT SPECIFICATION

EFFEKT/POWER	LJUSFLÖDE/LUMINAIRE FLUX	KELVIN	CRI	ART.
28W/E27	2240LM	3000	>80	3431-1-80

TILLBEHÖR/ACCESSORIES

LJUSFLÖDE/LUMINAIRE FLUX

Stolpe 3-4 m ovan mark/Pole 3-4 m above ground			Svart/Black	93230-1-06
--	--	--	-------------	------------


ZERO[®] BRASS

STOLPARMATUR/POLE FIXTURE



ZERO[®] BRASS

STOLPARMÄTUR/POLE FIXTURE

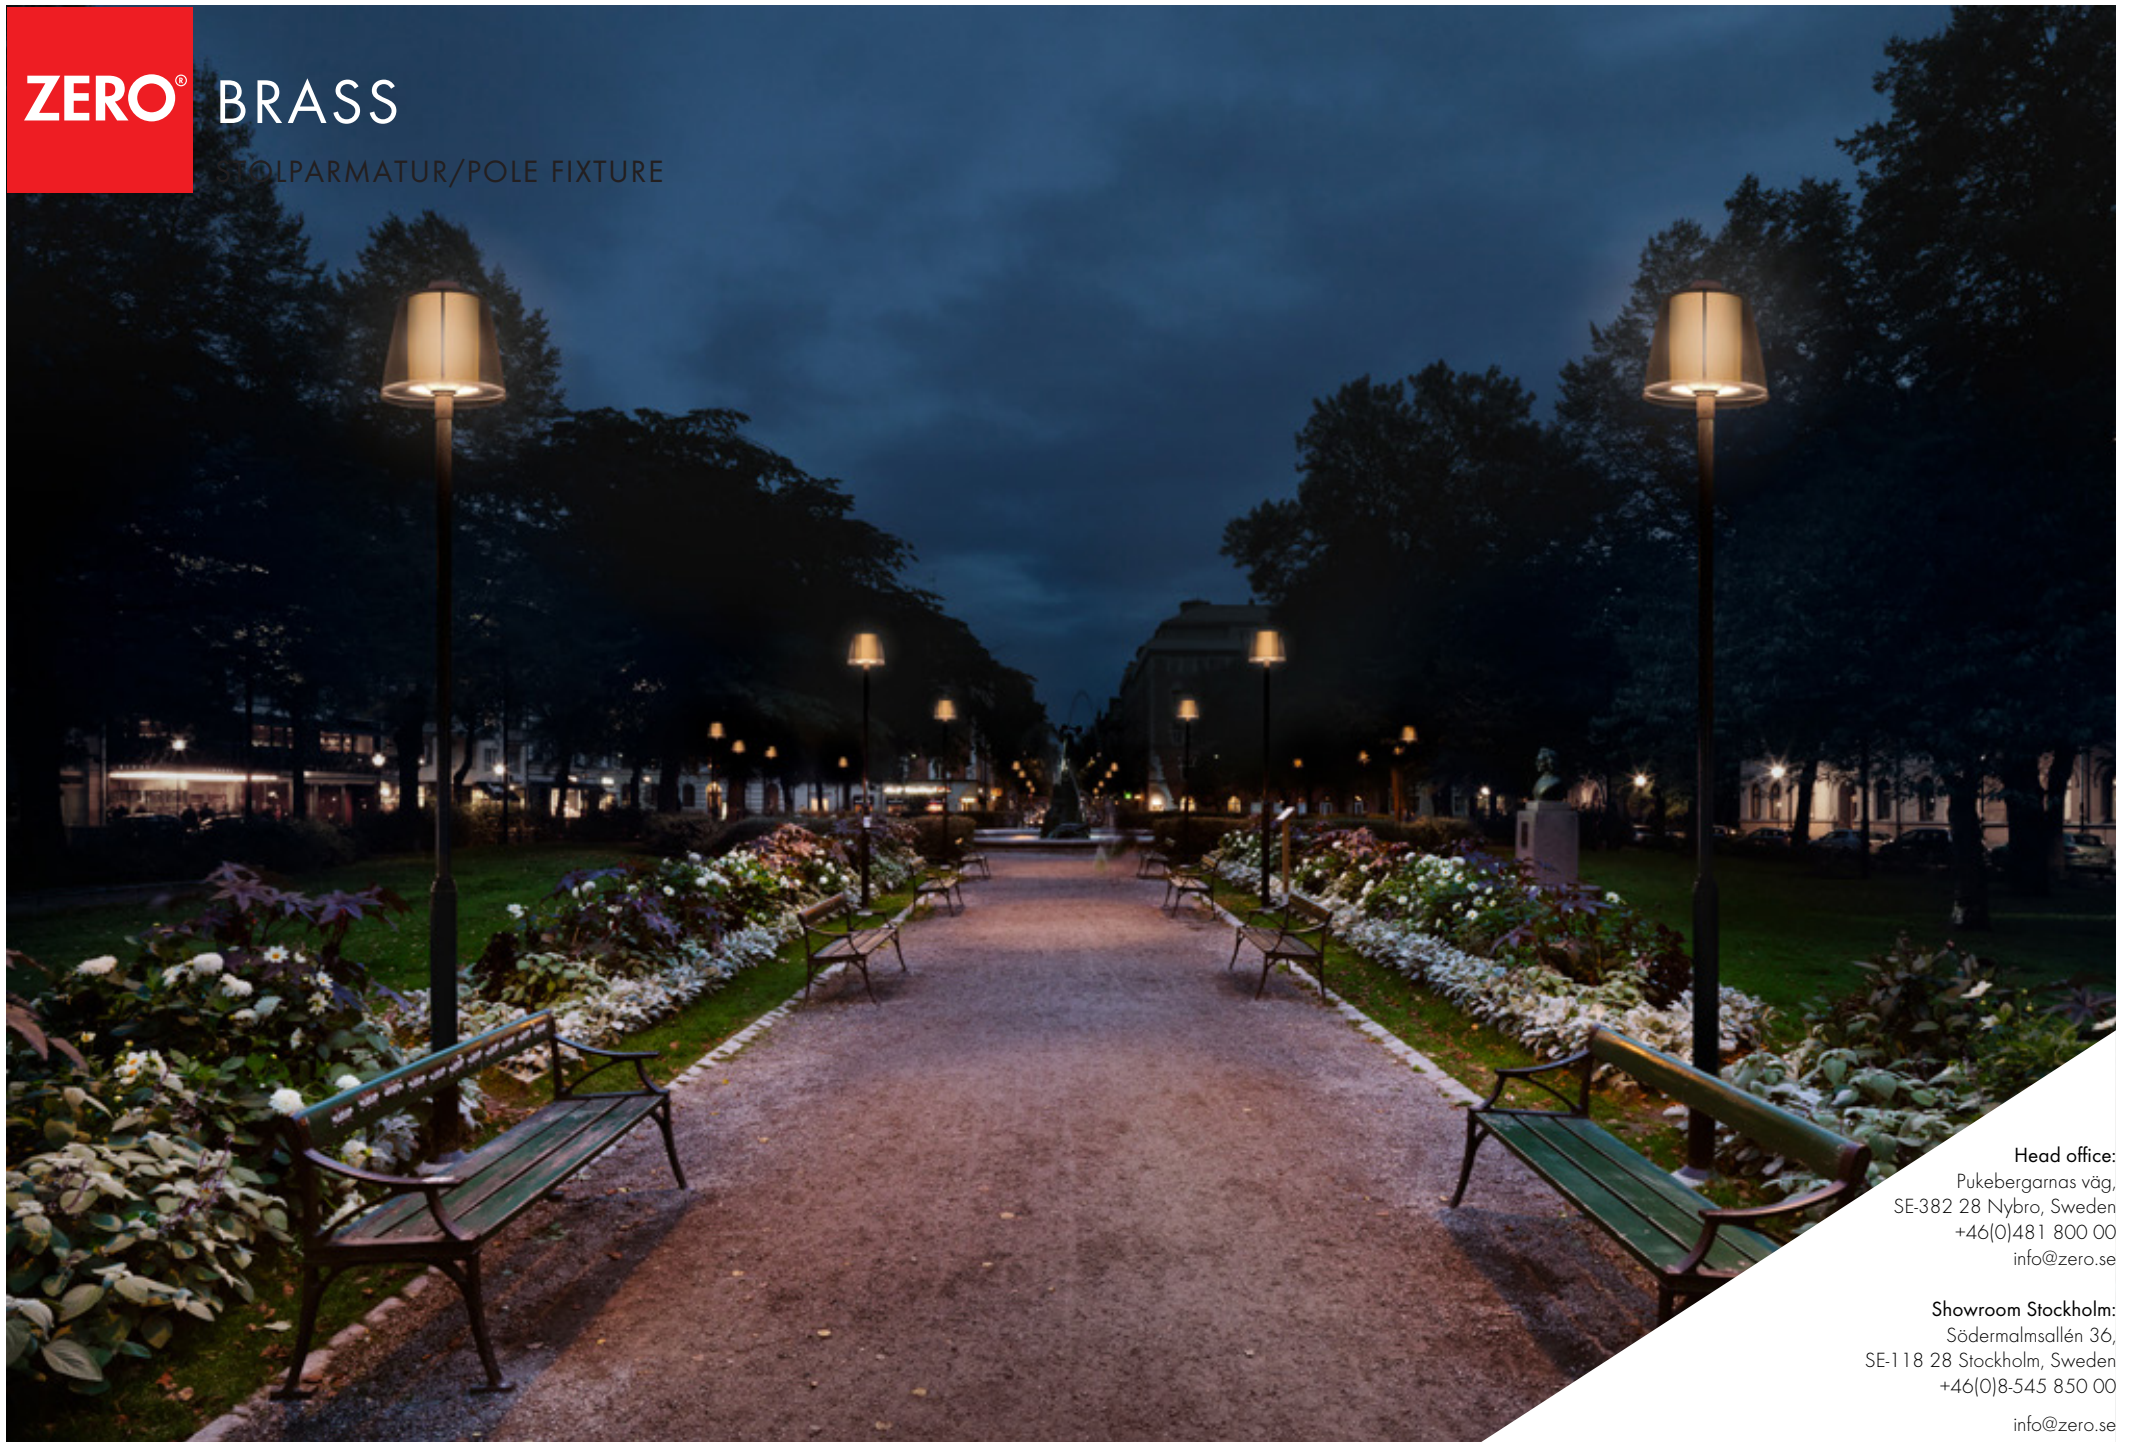

Head office:

Pukebergarnas väg,
SE-382 28 Nybro, Sweden
+46(0)481 800 00
info@zero.se

Showroom Stockholm:

Södermalmsallén 36,
SE-118 28 Stockholm, Sweden
+46(0)8-545 850 00

info@zero.se