

ZERO®

CITY

PENDEL/PENDANT



ZERO[®]

CITY

PENDEL/PENDANT



ZERO[®]

CITY

PENDEL/PENDANT



ZERO[®]**CITY**

PENDEL/PENDANT

Utförande

Lackerad aluminium. Svart RAL 9005 och gråbrun RAL 7006 som standard, andra färger på förfrågan. Inre skärm/reflektor i vitlackerad aluminium. Kan beställas utan galler på begäran. Inre matt glasgolb kan beställas separat.

Led info

Armaturlumen 2215LM Systemeffekt 23W. Korrelerad färgtemperatur 3000K. Färgtollerans SDCM 3. Färgåtergivning RA >80. L80, 80.000h.

Montage


I takkrok. Inkl takkopp. 2,5 m vajerpendel.

Anslutning

DCL kontakt alt. opplingsplint 5x4mm².

Design

Thomas Bernstrand 2016.

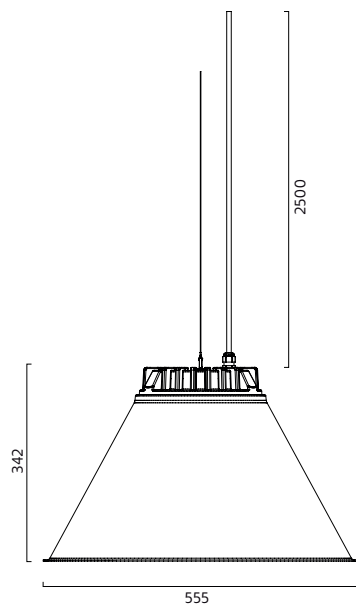**Finish**

Painted aluminum, black RAL 9005 or beige grey RAL 7006 as standard. Other colours on request.. Internal shade in white painted aluminum. Can be made without grid on request. Internal glass globe can be ordered separately.

Led info

System power 23W. Luminaire Luminous Flux 2215LM. CCT 3000K. SDCM 3. CRI >80. L80, 80.000h.

Installation


In ceiling-hook. Ceiling cup included. 2,5 m wire pendant.

Connection

DCL plug or terminal block 5x4mm².

Design

Thomas Bernstrand 2016.

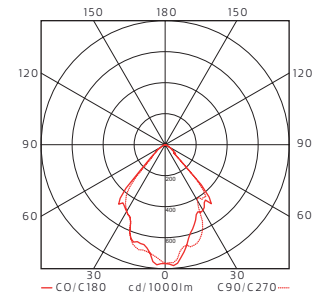

ZERO®**CITY**

PENDEL/PENDANT


PRODUKTFAKTA/PRODUCT SPECIFICATION

EFFEKT/POWER	KELVIN	CRI	W/KG	FÄRG /FINISH		ART.
LED						
23W/2215LM	3000K	>80	6,2	Svart/Black	On/Off	3391-3-06
23W/2215LM	3000K	>80	6,2	Svart/Black	Dali	3391-3-06HFF
23W/2215LM	3000K	>80	6,2	Gråbrun/Beige grey	On/Off	3391-3-66
23W/2215LM	3000K	>80	6,2	Gråbrun/Beige grey	Dali	3391-3-66HFF

HFF = Dimmbar med DALI alt SwitchDim/HFF = Dimmable DALI or SwitchDim.

TILLBEHÖR/ACCESSORY

Matt glasglob/Matt glass globe	9339-1-20
--------------------------------	-----------

Med sin arketypiska form och generösa diameter på dryga halvmeter är Citys användningsområde brett. Utomhus och inne, med fördel i detaljhandelsmiljöer, på industrier, i kollektivtrafik. Ingen risk för bländning då LED-källan sitter högt upp inuti den karaktärsfulla, branta konen där även ingjutna kylflänsar gömmer sig

With its archetypal shape and generous diameter, around half a metre, City has a wide range of applications: outdoor or indoor, enhancing retail environments, industries and public transport. There is no risk of glare as the LED sits high in the characterful, steep cone, which also hides the cast cooling flange.

ZERO[®]

CITY

LIN MONTAGE/CATENARY



Head office:
Friluftsvägen 2
382 34 Nybro, Sweden
+46(0)481 800 00
info@zero.se

Showroom Stockholm:
Södermalmsallén 36,
SE-118 28 Stockholm, Sweden
+46(0)8-545 850 00

info@zero.se