

ZERO[®]

CITY - INDOOR

LINMONTAGE/CATENARY

New improved fitting.



ZERO[®] CITY - INDOOR
LINMONTAGE/CATENARY

Picture shows the old wire fitting



ZERO®

CITY - INDOOR

LINMONTAGE/CATENARY

Picture shows the old wire fitting



ZERO[®]

CITY - INDOOR

LINMONTAGE/CATENARY

Utförande

Lackerad aluminium. Svart RAL 9005 och gråbrun RAL 7006 som standard, andra färger på förfrågan. Inre skärm/reflektor i vitlackerad aluminium. Kan beställas utan galler på begäran

Led info

Armaturlumen 2215LM Systemeffekt 223W. Korrelerad färgtemperatur 3000K. Färgtolerans SDCM 3. Färgåtergivning RA >80. L80, 80.000h.

Montage


På vajer 3-6 mm.

Anslutning

Kopplingsplint 5x4mm². i kopplingsbox. Överkopplingsbar.

Design

Thomas Bernstrand 2016.

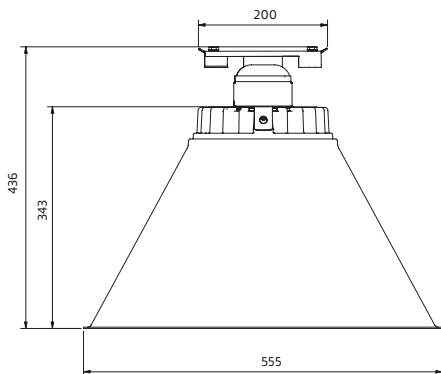

New improved fitting.



New improved fitting.

Finish

Painted aluminum, black RAL 9005 or beige grey RAL 7006 as standard. Other colours on request.. Internal shade in white painted aluminum. Can be made without grid on request

Led info

System power 23W. Luminaire Luminous Flux 2215LM. CCT 3000K. SDCM 3. CRI >80. L80, 80.000h.

Installation


On wire, 3-6 mm.

Connection

Terminal block 5x4mm² inside junction box. Double conduit entry.

Design

Thomas Bernstrand 2016.

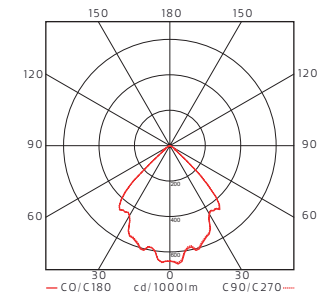

ZERO®

CITY - INDOOR

LINMONTAGE/CATENARY

New improved fitting.



PRODUKTFAKTA/PRODUCT SPECIFICATION

EFFEKT/POWER	KELVIN	CRI	W/KG	FÄRG /FINISH		ART.
LED						
23W/2215LM	3000K	>80	6,2	Svart/Black	On/Off	12086306-30
23W/2215LM	3000K	>80	6,2	Svart/Black	Dali	12086306D30
23W/2215LM	3000K	>80	6,2	Gråbrun/Beige grey	On/Off	12086366-30
23W/2215LM	3000K	>80	6,2	Gråbrun/Beige grey	Dali	12086366D30

D = Dimmbar med DALI alt SwitchDim/HFF = Dimmable DALI or SwitchDim.

Med sin arketypiska form och generösa diameter på dryga halvmeter är Citys användningsområde brett. Ingen risk för bländning då LED-källan sitter högt upp inuti den karaktärsfulla, branta konen där även ingjutna kylflänsar gömmer sig

With its archetypal shape and generous diameter, around half a metre. There is no risk of glare as the LED sits high in the characterful, steep cone, which also hides the cast cooling flange.

ZERO[®]

CITY - INDOOR

LINMONTAGE/CATENARY

New improved fitting.



Head office:

Friluftsvägen 2
382 34 Nybro, Sweden
+46(0)481 800 00
info@zero.se

Showroom Stockholm:

Södermalmsallén 36,
SE-118 28 Stockholm, Sweden
+46(0)8-545 850 00

info@zero.se