


ZERO[®]

GRID

PENDLAR/PENDANTS

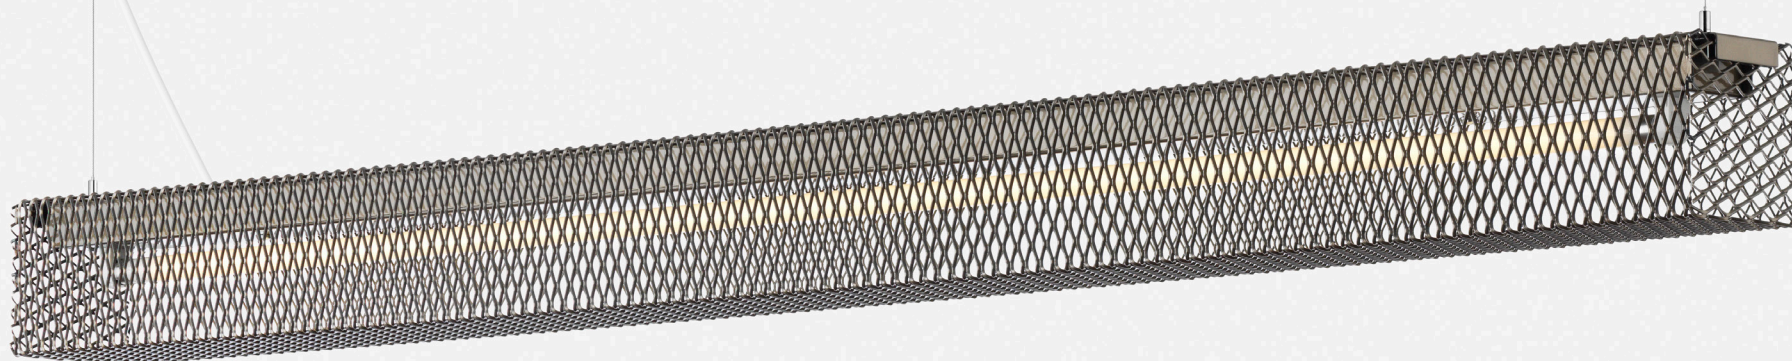

ZERO[®] GRID

PENDLAR/PENDANTS





GRID

PENDLAR/PENDANTS

Utförande

Perforerad metall med kvadratiska hål alt. sträckmetall.
Lackerad gul RAL 1018, orange RAL 2004, klarlackerad metall alt. transparent guld-lack. Grid har ett rått uttryck och man kan se svetsfogar mm genom den transparenta lacken. Andra färger på förfrågan.

LED info

Systemeffekt 19W, 33W. Armaturlumen 1414LM, 2210LM. Korrelerad färgtemperatur 3000K. Färgtolerans SDCM 3. Färgåtergivning RA 80.
Kan levereras med 4000K på begäran.

Montage


Pendlad från tak, 2 meter kabel och vajer.

Anslutning

Kabel med stickpropp, vid HFF utan stickpropp.

Design

Front 2011

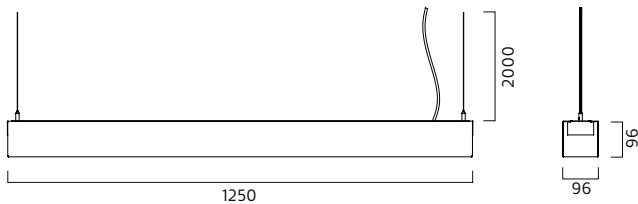

Finish

Perforated metal with square holes or expanded metal. Yellow RAL 1018, orange RAL 2004, clear painted metal or transparent gold varnish. Grid has a raw finish and one can see weldings through the transparent varnish. Other colours on request.

LED info

System power 19W or 33W. Luminaire Luminous Flux 1414LM or 2210LM. CCT 3000K. SDCM 3. CRI 80. Available with 4000K on request.

Installation



In ceiling, 2 m cable and wire.

Connection

Cable and plug, when HFF without plug.

Design

Front 2011

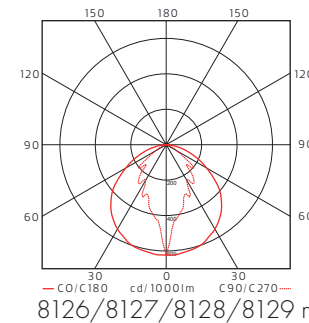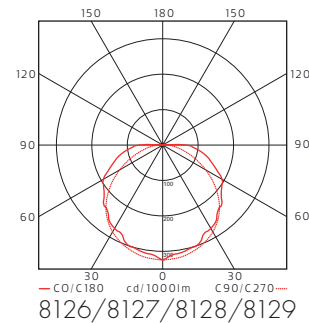

ZERO®**GRID**

PENDLAR/PENDANTS


PRODUKTFAKTA/PRODUCT SPECIFICATION


EFFEKT/POWER	KELVIN	CRI	MODELL/MODEL	FÄRG/COLOUR	ART.
LED 3000K					
1414LM/19W	3000K	>80	Fyrkantshål/Square holes	Gul/Yellow	8126-1-14
1414LM/19W	3000K	>80	Fyrkantshål/Square holes	Gul/Yellow	8126-1-14HFF
1414LM/19W	3000K	>80	Fyrkantshål/Square holes	Orange/Orange	8126-1-41
1414LM/19W	3000K	>80	Fyrkantshål/Square holes	Orange/Orange	8126-1-41HFF
1414LM/19W	3000K	>80	Fyrkantshål/Square holes	Metall/Metal	8126-1-76
1414LM/19W	3000K	>80	Fyrkantshål/Square holes	Metall/Metal	8126-1-76HFF
1414LM/19W	3000K	>80	Fyrkantshål/Square holes	Guld/Gold	8126-1-77
1414LM/19W	3000K	>80	Fyrkantshål/Square holes	Guld/Gold	8126-1-77HFF
1414LM/19W	3000K	>80	Streckmetall/Expanded metal	Gul/Yellow	8127-1-14
1414LM/19W	3000K	>80	Streckmetall/Expanded metal	Gul/Yellow	8127-1-14HFF
1414LM/19W	3000K	>80	Streckmetall/Expanded metal	Orange/Orange	8127-1-41
1414LM/19W	3000K	>80	Streckmetall/Expanded metal	Orange/Orange	8127-1-41HFF
1414LM/19W	3000K	>80	Streckmetall/Expanded metal	Metall/Metal	8127-1-76
1414LM/19W	3000K	>80	Streckmetall/Expanded metal	Metall/Metal	8127-1-76HFF
1414LM/19W	3000K	>80	Streckmetall/Expanded metal	Guld/Gold	8127-1-77
1414LM/19W	3000K	>80	Streckmetall/Expanded metal	Guld/Gold	8127-1-77HFF
2210LM/33W	3000K	>80	Fyrkantshål/Square holes	Gul/Yellow	8128-1-14
2210LM/33W	3000K	>80	Fyrkantshål/Square holes	Gul/Yellow	8128-1-14HFF
2210LM/33W	3000K	>80	Fyrkantshål/Square holes	Orange/Orange	8128-1-41
2210LM/33W	3000K	>80	Fyrkantshål/Square holes	Orange/Orange	8128-1-41HFF
2210LM/33W	3000K	>80	Fyrkantshål/Square holes	Metall/Metal	8128-1-76
2210LM/33W	3000K	>80	Fyrkantshål/Square holes	Metall/Metal	8128-1-76HFF
2210LM/33W	3000K	>80	Fyrkantshål/Square holes	Guld/Gold	8128-1-77
2210LM/33W	3000K	>80	Fyrkantshål/Square holes	Guld/Gold	8128-1-77HFF

HFF = Dimbar DALI, SwitchDim/HFF = Dimmable DALI or SwitchDim

Tabellen fortsätter på nästa sida/Specification continues on next page -

ZERO®**GRID**

PENDLAR/PENDANTS


PRODUKTFAKTA/PRODUCT SPECIFICATION

EFFEKT/POWER	KELVIN	CRI	MODELL/MODEL	FÄRG/COLOUR	ART.
LED 3000K					
2210LM/33W	3000K	>80	Streckmetall/Expanded metal	Gul/Yellow	8129-1-14
2210LM/33W	3000K	>80	Streckmetall/Expanded metal	Gul/Yellow	8129-1-14HFF
2210LM/33W	3000K	>80	Streckmetall/Expanded metal	Orange/Orange	8129-1-41
2210LM/33W	3000K	>80	Streckmetall/Expanded metal	Orange/Orange	8129-1-41HFF
2210LM/33W	3000K	>80	Streckmetall/Expanded metal	Metall/Metal	8129-1-76
2210LM/33W	3000K	>80	Streckmetall/Expanded metal	Metall/Metal	8129-1-76HFF
2210LM/33W	3000K	>80	Streckmetall/Expanded metal	Guld/Gold	8129-1-77
2210LM/33W	3000K	>80	Streckmetall/Expanded metal	Guld/Gold	8129-1-77HFF
TILLBEHÖR/ACCESSORIES			ART.		
Reflektor LED/Reflector LED			98126-1-82		
Dragströmbrytare/Pull-switch			98131-1-82		
Dragströmbrytare med dimmerfunktion, endast till HFF modell/ Pull-switch with dimmerfunction, only for HFF version			98132-1-82		
HFF = Dimbar DALI, SwitchDim/HFF = Dimmable DALI or SwitchDim			Tabellen fortsätter på nästa sida/Specification continues on next page -		

ZERO®**GRID**

PENDLAR/PENDANTS


PRODUKTFAKTA/PRODUCT SPECIFICATION


EFFEKT/POWER	KELVIN	CRI	MODELL/MODEL	FÄRG/COLOUR	ART.
LED 4000K					
1555LM/19W	4000K	>80	Fyrkantshål/Square holes	Gul/Yellow	8126-1-14-40
1555LM/19W	4000K	>80	Fyrkantshål/Square holes	Gul/Yellow	8126-1-14D40
1555LM/19W	4000K	>80	Fyrkantshål/Square holes	Orange/Orange	8126-1-41-40
1555LM/19W	4000K	>80	Fyrkantshål/Square holes	Orange/Orange	8126-1-41D40
1555LM/19W	4000K	>80	Fyrkantshål/Square holes	Metall/Metal	8126-1-76-40
1555LM/19W	4000K	>80	Fyrkantshål/Square holes	Metall/Metal	8126-1-76D40
1555LM/19W	4000K	>80	Fyrkantshål/Square holes	Guld/Gold	8126-1-77-40
1555LM/19W	4000K	>80	Fyrkantshål/Square holes	Guld/Gold	8126-1-77D40
1555LM/19W	4000K	>80	Streckmetall/Expanded metal	Gul/Yellow	8127-1-14-40
1555LM/19W	4000K	>80	Streckmetall/Expanded metal	Gul/Yellow	8127-1-14D40
1555LM/19W	4000K	>80	Streckmetall/Expanded metal	Orange/Orange	8127-1-41-40
1555LM/19W	4000K	>80	Streckmetall/Expanded metal	Orange/Orange	8127-1-41D40
1555LM/19W	4000K	>80	Streckmetall/Expanded metal	Metall/Metal	8127-1-76-40
1555LM/19W	4000K	>80	Streckmetall/Expanded metal	Metall/Metal	8127-1-76D40
1555LM/19W	4000K	>80	Streckmetall/Expanded metal	Guld/Gold	8127-1-77-40
1555LM/19W	4000K	>80	Streckmetall/Expanded metal	Guld/Gold	8127-1-77D40
2430LM/33W	4000K	>80	Fyrkantshål/Square holes	Gul/Yellow	8128-1-14-40
2430LM/33W	4000K	>80	Fyrkantshål/Square holes	Gul/Yellow	8128-1-14D40
2430LM/33W	4000K	>80	Fyrkantshål/Square holes	Orange/Orange	8128-1-41-40
2430LM/33W	4000K	>80	Fyrkantshål/Square holes	Orange/Orange	8128-1-41D40
2430LM/33W	4000K	>80	Fyrkantshål/Square holes	Metall/Metal	8128-1-76-40
2430LM/33W	4000K	>80	Fyrkantshål/Square holes	Metall/Metal	8128-1-76D40
2430LM/33W	4000K	>80	Fyrkantshål/Square holes	Guld/Gold	8128-1-77-40
2430LM/33W	4000K	>80	Fyrkantshål/Square holes	Guld/Gold	8128-1-77D40

HFF = Dimbar DALI, SwitchDim/HFF = Dimmable DALI or SwitchDim

Tabellen fortsätter på nästa sida/Specification continues on next page -

ZERO®**GRID**

PENDLAR/PENDANTS

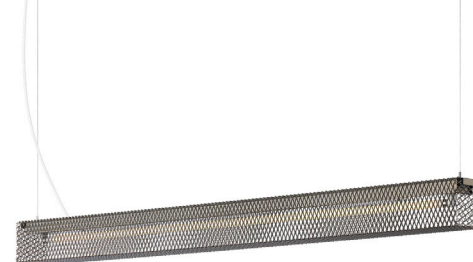
PRODUKTFAKTA/PRODUCT SPECIFICATION

EFFEKT/POWER	KELVIN	CRI	MODELL/MODEL	FÄRG/COLOUR	ART.
LED 4000K					
2430LM/33W	4000K	>80	Streckmetall/Expanded metal	Gul/Yellow	8129-1-14-40
2430LM/33W	4000K	>80	Streckmetall/Expanded metal	Gul/Yellow	8129-1-14D40
2430LM/33W	4000K	>80	Streckmetall/Expanded metal	Orange/Orange	8129-1-41-40
2430LM/33W	4000K	>80	Streckmetall/Expanded metal	Orange/Orange	8129-1-41D40
2430LM/33W	4000K	>80	Streckmetall/Expanded metal	Metall/Metal	8129-1-76-40
2430LM/33W	4000K	>80	Streckmetall/Expanded metal	Metall/Metal	8129-1-76D40
2430LM/33W	4000K	>80	Streckmetall/Expanded metal	Guld/Gold	8129-1-77-40
2430LM/33W	4000K	>80	Streckmetall/Expanded metal	Guld/Gold	8129-1-77D40

D40 = Dimbar DALI, SwitchDim D40 = Dimmable DALI or SwitchDim

TILLBEHÖR/ACCESSORIES

	ART.
Reflektor LED/Reflector LED	98126-1-82
Dragströmbrytare/Pull-switch	98131-1-82
Dragströmbrytare med dimmerfunktion, endast till HFF modell/ Pull-switch with dimmerfunction, only for HFF version	98132-1-82

ZERO[®]

GRID

PENDLAR/PENDANTS



ZERO[®]

GRID

PENDLAR/PENDANTS



The image features a dark background with three rectangular pendant lights made of a gold-colored metal grid. One light is positioned horizontally in the lower right, while two others are positioned diagonally in the upper left. The lights are illuminated from within, casting a warm glow and creating distinct shadows on the surface below. In the top left corner, there is a red square containing the word 'ZERO' in white, followed by 'GRID' in white text. Below this, the words 'PENDLAR/PENDANTS' are written in a smaller white font.

ZERO GRID

PENDLAR/PENDANTS

Head office:
Friluftsvägen 2
SE-382 31 Nybro, Sweden
+46(0)481 800 00
info@zero.se

Showroom Stockholm:
Södermalmsallén 36,
SE-118 28 Stockholm, Sweden
+46(0)8-545 850 00

info@zero.se