

ZERO[®]

PATHFINDER

POLLARE/BOLLARD





PATHFINDER

POLLARE/BOLLARD

Utförande

Lackerad gjuten aluminium. Svart RAL 9005 alt. cortenlack. Andra färger på begäran. Bländskydd av microprisma. Symmetrisk eller asymmetrisk. Andra höjder tillverkas på förfrågan, lägsta möjliga totalhöjd med ett armaturhuvud är 600 mm ovan mark. Det är möjligt att montera på upp till 3st extra armaturhuvden. IK 10.

LED info

Systemeffekt 10W. Armaturlumen 430LM, 480LM. Korrelerad färgtemperatur 3000K. Färgtolerans SDCM 3. Färgåtergivning RA >90. L70 B10 50.000 timmar.

Montage


I nedsticksfundament D 76 mm alt. med montageplatta för ytmontage ovan mark.

Anslutning


Kopplingsplint/säkringshållare 2x4 x16mm².

Design

Kauppi & Kauppi 2019.


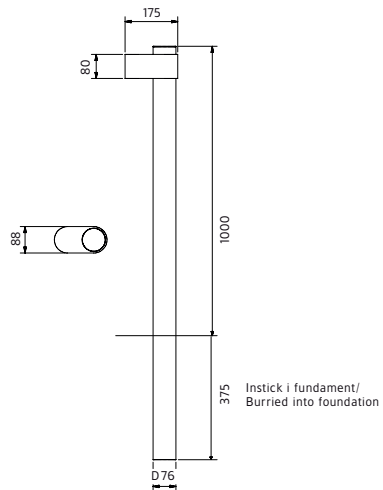


Pollare enkel till fundament/
Bollard single for ground installation

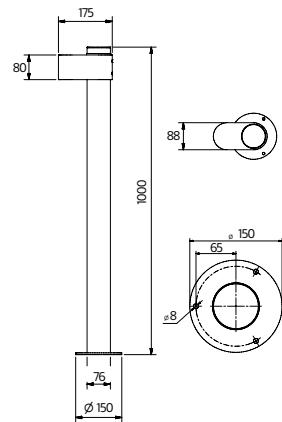


Pollare enkel för ytmontage/
Bollard single for surface mounting


Extra armaturhuvud/
Extra luminaire head

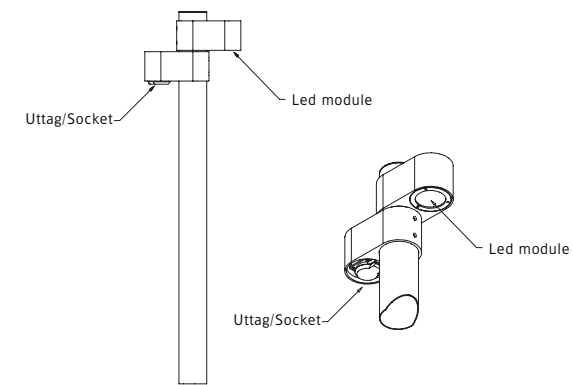

Exempel pollare med uttag/
Example bollard with socket type F

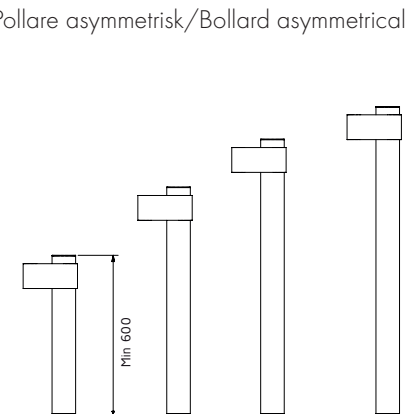

Exempel specialhöjder/
Example custom heights

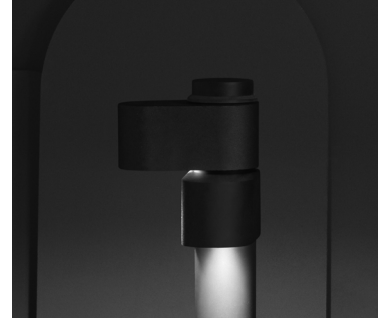

Finish

Painted casted aluminum. Black RAL 9005 or corten finish. Other colours on request. Diffuser in microprisma. Symmetrical or asymmetrical. Possible to produce in different heights on request, lowest possible height above ground is 600 mm with one luminaire head. It's possible to mount up to 3 extra luminaire heads. IK 10.

LED info

System power 10W. Luminaire luminous flux 430LM, 480LM. CCT 3000K. SDCM 3. CRI >90.. L70 B10 50.000h.

Installation


In buried foundation D 76 mm or with ground plate for surface mounting.

Connection


Terminal block 2x4 x16mm².

Design

Kauppi & Kauppi 2019.

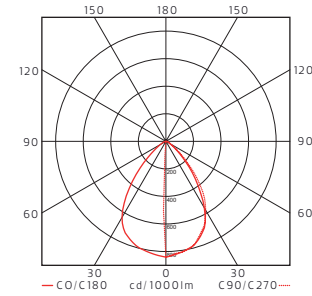

Pollare symmetrisk/Bollard symmetrical

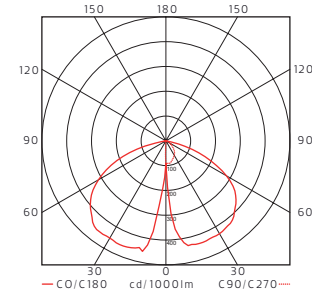


Pollare asymmetrisk/Bollard asymmetrical



PATHFINDER

POLLARE/BOLLARD

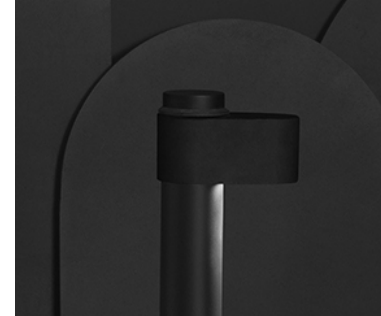

PRODUKTFAKTA/PRODUCT SPECIFICATION

EFFEKT/POWER	LJUSFLÖDE/LUMINAIRE FLUX	KELVIN/KELVIN	CRI	Färg/Color	Modell/Model	ART.
Pollare till fundament symmetrisk/Bollard for ground installation symmetrical						
10W	430LM	3000K	>90	Svart/Black	Pollare enkel/Bollard single	13005106-30
10W	430LM	3000K	>90	Corten/Corten	Pollare enkel/Bollard single	13005147--30
Pollare till fundament asymmetrisk/Bollard for ground installation asymmetrical						
10W	480LM	3000K	>90	Svart/Black	Pollare enkel/Bollard single	13006106-30
10W	480LM	3000K	>90	Corten/Corten	Pollare enkel/Bollard single	13006147--30
Pollare för ytmontage symmetrisk/Bollard for surface mounting symmetrical						
10W	430LM	3000K	>90	Svart/Black	Pollare enkel/Bollard single	13007106-30
10W	430LM	3000K	>90	Corten/Corten	Pollare enkel/Bollard single	13007147--30
Pollare för ytmontage asymmetrisk/Bollard for surface mounting asymmetrical						
10W	480LM	3000K	>90	Svart/Black	Pollare enkel/Bollard single	13008106-30
10W	480LM	3000K	>90	Corten/Corten	Pollare enkel/Bollard single	13008147--30
Extra armaturhuvud symmetrisk/Extra luminaire head symmetrical						
10W	430LM	3000K	>90	Svart/Black	Armatrhuvud sym/Luminaire head sym	13009106-30
10W	430LM	3000K	>90	Corten/Corten	Armatrhuvud sym/Luminaire head sym	13009147--30
Extra armaturhuvud asymmetrisk/Extra luminaire head asymmetrical						
10W	480LM	3000K	>90	Svart/Black	Armatrhuvud asym/Luminaire head asym	13010106-30
10W	480LM	3000K	>90	Corten/Corten	Armatrhuvud asym/Luminaire head asym	13010147--30
Extra armaturhuvud med eluttag typ F - max 2000W/Extra luminaire head with electrical socket type F - max 2000W						
Armatrhuvud med eluttag/Extra luminaire head with elektrical socket type F				Svart/Black		13011106
Armatrhuvud med eluttag/Extra luminaire head with elektrical socket type F				Corten/Corten		13011147



ZERO[®] PATHFINDER
POLLARE/BOLLARD



ZERO[®] PATHFINDER

POLLARE/BOLLARD



Kauppi & Kauppi

Kauppi & Kauppi is a designer duo with roots in the very north and south of Sweden. Johan and Nina has both earned their MFA degree at the Academy of Design & Crafts at The University of Gothenburg. In 2016 they established the shared design studio Kauppi & Kauppi in Sweden, after living several years in New York and Frankfurt. The studio approaches design and communication in all scales, from spatial projects to tactile objects in the hand's scale. When developing designs, their interest in creating collections and strategic product families runs like a thread through their work flow. The studio's design philosophy is identified by a search for a pure and restrained design, celebrating the added values that makes a project unique and genuine. The inspiration is often found in the contrasts, between north and south and in the dynamic between tranquil nature and pulsing cityscapes.

The ZERO logo consists of the word "ZERO" in a bold, white, sans-serif font, set against a solid red rectangular background.

PATHFINDER

POLLARE/TAK/VÄGG/BOLLARD/CEILING/WALL



Head office:

Friluftsvägen

SE-382 28 Nybro, Sweden

+46(0)481 800 00

info@zero.se

Showroom Stockholm:

Södermalmsallén 36,

SE-118 28 Stockholm, Sweden

+46(0)8-545 850 00

info@zero.se