

Takarmatur som är perfekt vid lägre takhöjder, då den endast bygger 100 mm ner från tak.

**Utförande:** Mörkgrå strukturlack. Skärm av matt opalglas.

**Montage:** Dikt tak.

**Anslutning:** Snabbkopplingsplint 5x4mm<sup>2</sup>. Överkopplingsbar. Distans för utanpåliggande kabel finns som tillbehör.

**Design:** Per Sundstedt.

**LED info:** Systemeffekt 17W. Armaturlumen 1290LM. Korrelerad färgtemperatur 3000K. Färgtolerans SDCM 3. Färgåtergivning RA 80.

W	SKÄRM/SHADE	KG	ART
LED 1290LM	Glas/Glass	2,5	4066-1-21
LED 1290LM	Glas/Glass	2,5	4066-1-21HFF

**Med inbyggd närvarosensor/With built-in motion detector**

LED 1290LM	Glas/Glass	2,5	4066-1-21S
LED 1290LM	Glas/Glass	2,5	4066-1-21HFFS

HFF = Dimmbar - DALI, DSI, SwitchDim.

HFF = Dimmable with DALI, DSI, SwitchDim

**TILLBEHÖR/ACCESSORY**

Distans för utanpåliggande ledning	94063-1-01
Distance-piece for external mains cable	



**Finish:** Dark-grey painted steel. Shade in matt opal glass.

**Installation:** Ceiling-installation.

**Connection:** Snap-in terminal block 5x4mm<sup>2</sup>. Two cable entries. Distance-piece for external mains cable available as accessory.

**Design:** Per Sundstedt.

**LED info:** System power: 17W. Luminaire Luminous Flux: 1290LM. CCT 3000K. SDCM 3. CRI 80.

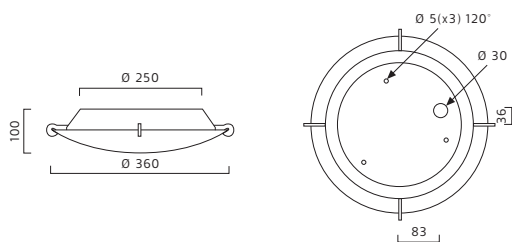

— C0/C180 cd/1000lm C90/C270 —

