

**ZERO**<sup>®</sup>


# LANDSCAPE

PENDLAR/PENDANTS



# ZERO<sup>®</sup> LANDSCAPE

## PENDLAR/PENDANTS

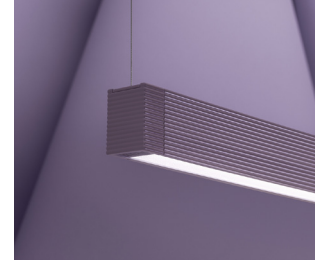

### Utförande

Lackerad aluminium. Vit RAL 9010, svart RAL 9005, alugrå, blå metallic alt. lila metallic. Bländskydd av microprisma. 60% uppljus 40% nedljus. Tillbehör för rak och 90gr rampmontage finns, ndra vinklar på förfrågan. Andra färger på förfrågan. UGR<19. DALI, SwitchDim som standard.

### LED info

Systemeffekt 50W, 93W. Armaturlumen 4140LM, 4456LM, 5210LM, 6685LM. Korrelerad färgtemperatur 3000K, 4000K. Färgtolerans SDCM 3. Färgåtergivning RA 80. L90 >100.000h.

### Montage

Pendlas från tak i 2,5 m transparent kabel och vajer.

### Anslutning

Kopplingsplint 5x4mm<sup>2</sup>.

### Design

Note Design Studio 2020.

Idén att omvandla miljöer förknippade med raka linjer och repetitive strukturer, var utgångspunkten vid utformningen av Landscape. Inspirerad av frånvaron av raka linjer i naturen extraherade vi siluetten av avlägsna bergskedjor. I mötet mellan flera armaturer kan man särskilja toppar och dalar, som ett rullande landskap. Använd Landscape som en pendel på egen hand, eller skapa en kontinuerlig siluett.

The idea of transforming environments associated with straight lines and repetitive structures, was the starting point when designing the Landscape pendant. Inspired by the absence of linearity in the unrestricted nature, we extracted the silhouette of distant mountain ranges. In the meeting between several luminaries, one can distinguish peaks and valleys, as a rolling landscape. Use as a signum pendant on its own, or create a continuous silhouette.

### Finish

Painted aluminum. White RAL 9010, black RAL 9005, alugrey, blue metallic or purple metallic. Diffuser in microprisma. 60% uplight & 40% downlight. Other colours on request. UGR <19. Bracket to connect several fixtures available as accessory. DALI, SwitchDim as standard.

### LED info

System power: 50W, 93W. Luminaire Luminous Flux: 4140LM, 4456LM, 5210LM, 6685LM. CCT 2700K, 3000K. SDCM 3. CRI 80. L90 >100.000h.

### Installation

In ceiling, 2,5 m transparent cable and wire.


### Connection

Terminal-block 5x4mm<sup>2</sup>.




### Design

Note Design Studio 2020.

163001

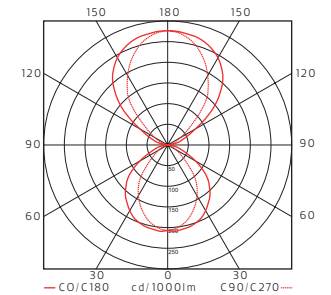

163003

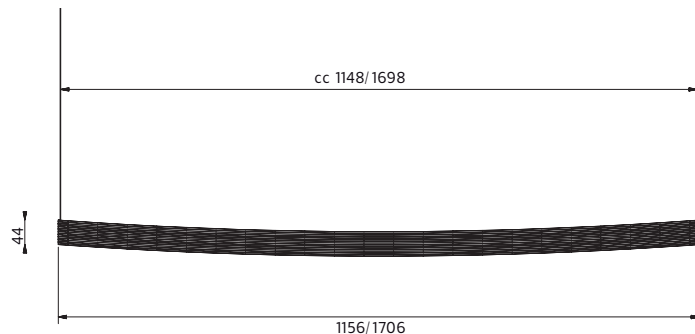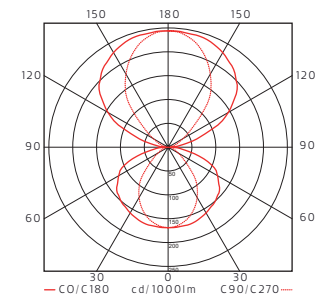

**ZERO®****LANDSCAPE**

PENDLAR/PENDANTS


**PRODUKTFAKTA/PRODUCT SPECIFICATION**

EFFEKT/POWER	KELVIN	CRI	FÄRG/COLOUR	L/MM	ART.
<b>LED</b>					
50W/4140LM	3000K	>80	Vit/White	1156	16300101D30
50W/4140LM	3000K	>80	Svart/Black	1156	16300106D30
50W/4140LM	3000K	>80	Blå/Blue	1156	16300108D30
50W/4140LM	3000K	>80	Alu/Alu	1156	16300111D30
50W/4140LM	3000K	>80	Lila/Purple	1156	16300144D30
50W/4456LM	4000K	>80	Vit/White	1156	16300101D40
50W/4456LM	4000K	>80	Svart/Black	1156	16300106D40
50W/4456LM	4000K	>80	Blå/Blue	1156	16300108D40
50W/4456LM	4000K	>80	Alu/Alu	1156	16300111D40
50W/4456LM	4000K	>80	Lila/Purple	1156	16300144D40
93W/6210LM	3000K	>80	Vit/White	1706	16300301D30
93W/6210LM	3000K	>80	Svart/Black	1706	16300306D30
93W/6210LM	3000K	>80	Blå/Blue	1706	16300308D30
93W/6210LM	3000K	>80	Alu/Alu	1706	16300311D30
93W/6210LM	3000K	>80	Lila/Purple	1706	16300344D30
93W/6685LM	4000K	>80	Vit/White	1706	16300301D40
93W/6685LM	4000K	>80	Svart/Black	1706	16300306D40
93W/6685LM	4000K	>80	Blå/Blue	1706	16300308D40
93W/6685LM	4000K	>80	Alu/Alu	1706	16300311D40
93W/6685LM	4000K	>80	Lila/Purple	1706	16300344D40

D = Dimbar DALI alt. SwitchDim/Dimmable DALI or SwitchDim.

**TILLBEHÖR/ACCESSORIES**

Rak koppling/Straight connector	9163001xx
L-koppling/L-connector	9163002xx

**ZERO**<sup>®</sup>

LANDSCAPE

PENDLAR/PENDANTS



**ZERO**<sup>®</sup>

LANDSCAPE

PENDLAR/PENDANTS



Head office:  
Friluftsvägen 2  
SE-382 34 Nybro, Sweden  
+46(0)481 800 00  
info@zero.se

Showroom Stockholm:  
Södermalmsallén 36,  
SE-118 28 Stockholm, Sweden  
+46(0)8-545 850 00

info@zero.se